
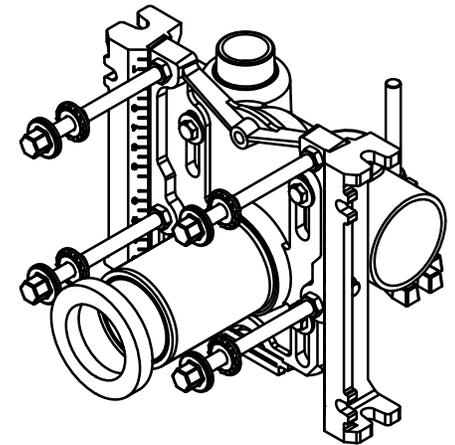


SPECIFICATION:

JOSAM 12684 SERIES COATED CAST IRON SINGLE HORIZONTAL 4" NO-HUB RIGHT-HAND OFFSET FITTING WITH 2" NO-HUB VENT AND ADJUSTABLE CARRIER BODY, INVERTIBLE FOR SIPHON JET OR BLOWOUT CLOSETS, WITH ABS EXTENSION WITH INTEGRAL TEST CAP, PYLON FEET, ANCHOR FOOT, PLATED HARDWARE AND NEOPRENE FIXTURE GASKET. 500 LB CAPACITY.

**CLOSET CARRIER
RIGHT HAND**

SERIES **12684**

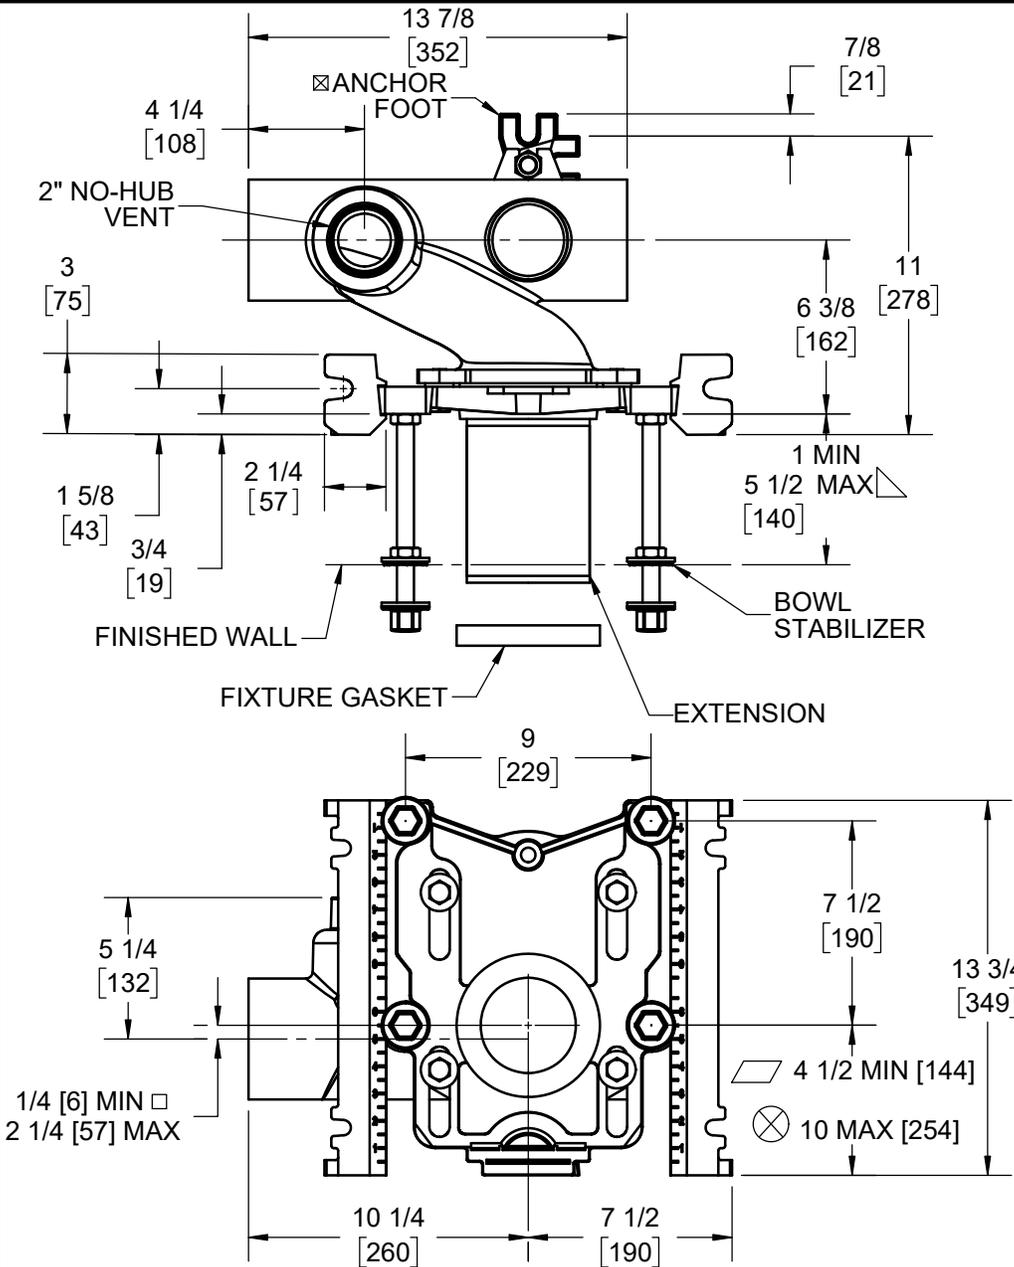

▽ FOR DIMENSION SHORTER THAN 5-1/2" (1" MIN) CUT EXTENSION. FOR LONGER EXTENSION (10-1/2" MAX) SPECIFY (-10)

⊠ RECOMMEND FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS (BY OTHERS).

⊗ FOR SIPHON JET ROUGHING OVER 6" OR BLOWOUT ROUGHING OVER 12-1/2" SPECIFY ON ORDER.

SIPHON JET DIMS SHOWN. FOR BLOWOUT DIMS, USE:

□ MIN 2" & MAX 4"

▱ MIN 11" & MAX 16 1/2"

⊙ AUX INLET IS 6" OFFSET FROM VENT

	-XSD	EXTRA SPECIAL DUTY 1,000 LB CARRIER		-SDH	SPECIAL DUTY HIGH 750 LB CARRIER
	-PF	NPT FCPLT AND EXT - STD		-6	SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE)
	-OR	O-RING FCPLT AND EXT		-10	ABS EXTENSION THROUGH 10-1/2" WALL
	-CR	COMP. RING FCPLT AND EXT		-24	FLOOR MOUNTED BACK OUTLET CHINA BOWL
	-PAF	PREFAB ADJUSTABLE FOOT		-30	CAST IRON ADJ. EXTENSION W/ CONNECTOR
	-HS	HUB & SPIGOT		-30-2	CAST IRON ADJ. EXTENSION W/ CONNECTOR & TEST CAP
	-AUX	AUXILIARY INLET (2" NO-HUB)		-32	CARRIER FOR WIDE CHASE INSTALLATIONS
	-HUB AUX	AUXILIARY INLET (2" HUB)		-35	CARRIER FOR WHEELCHAIR HIGH ROUGH
	-VP	VANDAL-PROOF TRIM		-58	HORIZONTAL NO-HUB CAST LONG BARREL
				-1	POSITIONING FRAME

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 10/20/22 JTJ

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

JOSAM
MICHIGAN CITY, INDIANA

NOTES