
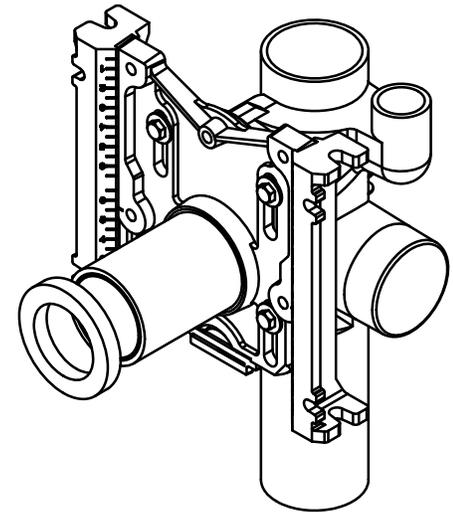


SPECIFICATION:

JOSAM 12714 SERIES COATED CAST IRON SINGLE VERTICAL 4" NO-HUB FITTING WITH 2" NO-HUB RIGHT-HAND OFFSET VENT, ADJUSTABLE CARRIER BODY, INVERTIBLE FOR SIPHON JET OR BLOWOUT CLOSETS, WITH ABS EXTENSION WITH INTEGRAL TEST CAP, PYLON FEET, ANCHOR FOOT, PLATED HARDWARE AND NEOPRENE FIXTURE GASKET

CLOSET CARRIER
VERTICAL WITH RIGHT HAND VENT

SERIES **12714**

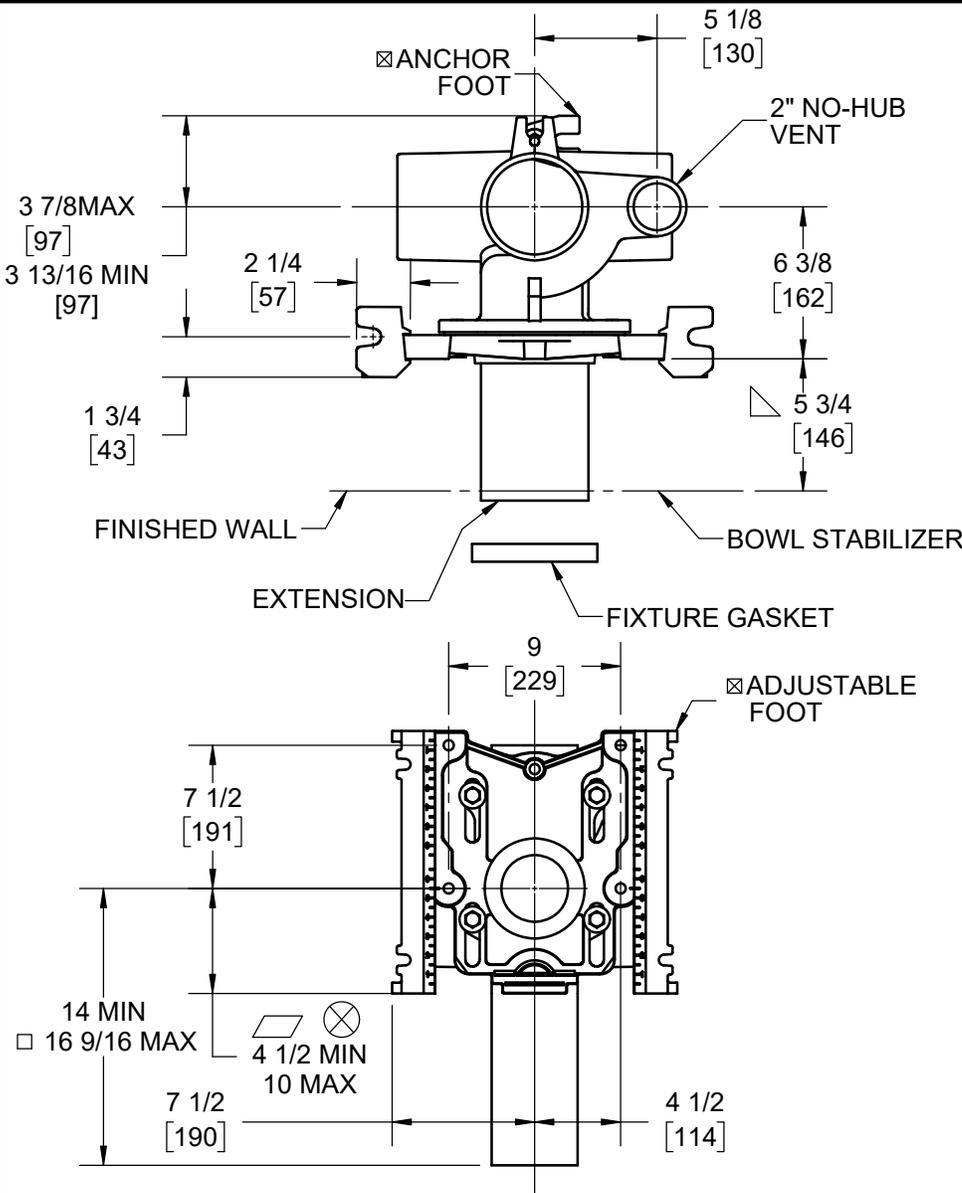

△ FOR DIMENSION SHORTER THAN 5-1/2" (1" MIN) CUT EXTENSION. FOR LONGER EXTENSION (10-1/2" MAX) SPECIFY (-10)

☒ RECOMMEND FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS (BY OTHERS).

⊗ FOR SIPHON JET ROUGHING OVER 6" OR BLOWOUT ROUGHING OVER 12-1/2" SPECIFY ON ORDER.

SIPHON JET DIMS SHOWN. FOR BLOWOUT DIMS, USE:

▱ MIN 11 & MAX 16-1/2
 □ MIN 15 11/16 & MAX 18-1/4

-PAF	PREFAB ADJUSTABLE FOOT	-1	POSITIONING FRAME
-XSD	EXTRA SPECIAL-DUTY 1,000 LB CARRIER	-6	SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE)
-PF	PYLON FOOT, STD.	-10	ABS EXTENSION THROUGH 10-1/2" WALL
-OR	O-RING CARRIER	-24	FLOOR MOUNTED BACK OUTLET CHINA BOWL
-SD	SPECIAL-DUTY 500 LB. CARRIER	-30	CAST IRON ADJ. EXTENSION W/ CONNECTOR
-HS	HUB & SPIGOT	-30-2	CAST IRON ADJ. EXTENSION W/ CONNECTOR & TEST CAP
-LH4	LEFT-HAND 4" NO-HUB BRANCH	-32	CARRIER FOR WIDE CHASE INSTALLATIONS
-HLH4	LEFT-HAND 4" HUB BRANCH	-35	CARRIER FOR WHEELCHAIR HIGH ROUGH
-RH4	RIGHT-HAND 4" NO-HUB BRANCH	-49	NO-HUB AUXILIARY INLET, UNDER VENT
-HRH4	RIGHT-HAND 4" HUB BRANCH	-50	NO-HUB AUXILIARY INLET, OPPOSITE VENT
-D4	DOUBLE 4" NO-HUB BRANCHES	-53	THREADED AUXILIARY INLET, UNDER VENT
-HD4	DOUBLE 4" HUB BRANCHES	-54	THREADED AUXILIARY INLET, OPPOSITE VENT
-VP	VANDAL-PROOF TRIM		

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 4/20/21

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

JOSAM
 MICHIGAN CITY, INDIANA

NOTES