



SPECIFICATION:

JOSAM 12724-OS4 SERIES COATED CAST IRON DOUBLE VERTICAL 4" NO-HUB ON STACK FITTING WITH OPPOSITE VENT SIDE 4" NO-HUB BRANCH INLET AND 2" NO-HUB OFFSET VENT, ADJUSTABLE CARRIER BODY, INVERTIBLE FOR SIPHON JET OR BLOWOUT CLOSURES, WITH ABS EXTENSION WITH INTEGRAL TEST CAP, PYLON FEET, ANCHOR FOOT, PLATED HARDWARE AND NEOPRENE FIXTURE GASKET.

**CLOSET CARRIER
VERTICAL BACK-TO-BACK**

SERIES **12724-OS4**

FORMERLY 12784 SERIES


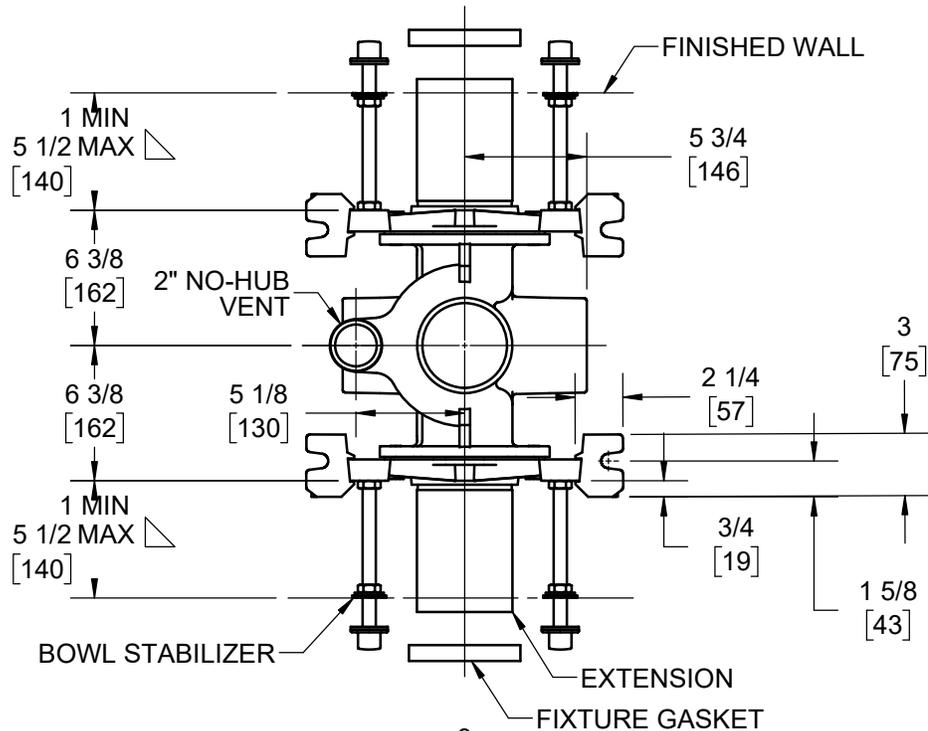


△ FOR DIMENSION SHORTER THAN 5-1/2" (1" MIN) CUT EXTENSION. FOR LONGER EXTENSION (10-1/2" MAX) SPECIFY (-10)

☒ RECOMMEND FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS (BY OTHERS).

⊗ FOR SIPHON JET ROUGHING OVER 6" OR BLOWOUT ROUGHING OVER 12-1/2" SPECIFY ON ORDER.

SIPHON JET DIMS SHOWN. FOR BLOWOUT DIMS, USE:

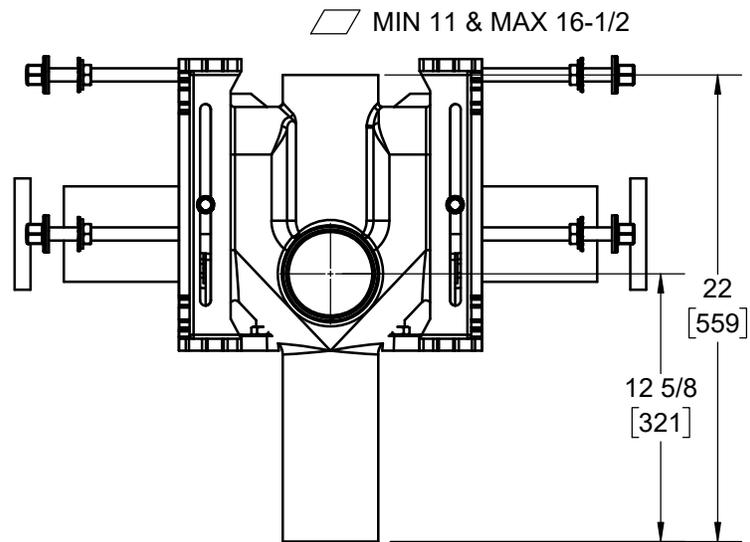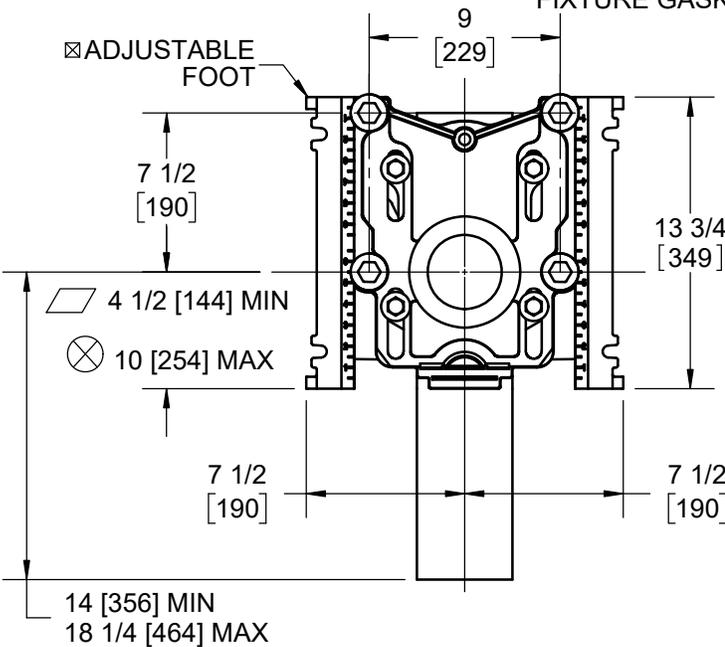

| | | |
|---|-------|--|
| | -XSD | EXTRA SPECIAL-DUTY 1,000 LB CARRIER |
| | -PF | PYLON FOOT, STD. |
| | -OR | O-RING CARRIER |
| | -HS | HUB & SPIGOT |
| X | -OS4 | OPPOSITE VENT 4" NO-HUB BRANCH |
| | -HVS4 | VENT SIDE 4" HUB BRANCH |
| | -VP | VANDAL-PROOF TRIM |
| | -1 | POSITIONING FRAME |
| | -6 | SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE) |

| | | |
|--|-------|--|
| | -10 | ABS EXTENSION THROUGH 10-1/2" WALL |
| | -24 | FLOOR MOUNTED BACK OUTLET CHINA BOWL |
| | -30 | CAST IRON ADJ. EXTENSION W/ CONNECTOR |
| | -30-2 | CAST IRON ADJ. EXTENSION W/ CONNECTOR & TEST CAP |
| | -32 | CARRIER FOR WIDE CHASE INSTALLATIONS |
| | -35 | CARRIER FOR WHEELCHAIR HIGH ROUGH |
| | -49 | 2" NO-HUB AUXILIARY INLET, UNDER VENT |
| | -53 | 2" THREADED AUXILIARY INLET, UNDER VENT |

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 11/03/22 JTJ

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

JOSAM
MICHIGAN CITY, INDIANA

NOTES