


SPECIFICATION:

JOSAM 12704-HS-HRH4 SERIES COATED CAST IRON SINGLE VERTICAL 4" HUB & SPIGOT FITTING WITH RIGHT-HAND 4" HUB & SPIGOT BRANCH INLET AND 2" HUB & SPIGOT LEFT-HAND OFFSET VENT. ADJUSTABLE CARRIER BODY, INVERTIBLE FOR SIPHON JET OR BLOWOUT CLOSETS, WITH ABS EXTENSION WITH INTEGRAL TEST CAP, PYLON FEET, ANCHOR FOOT, PLATED HARDWARE AND NEOPRENE FIXTURE GASKET.

**CLOSET CARRIER
VERTICAL W/ LEFT HAND VENT**

SERIES 12704-HS-HRH4

FORMERLY 12234A SERIES

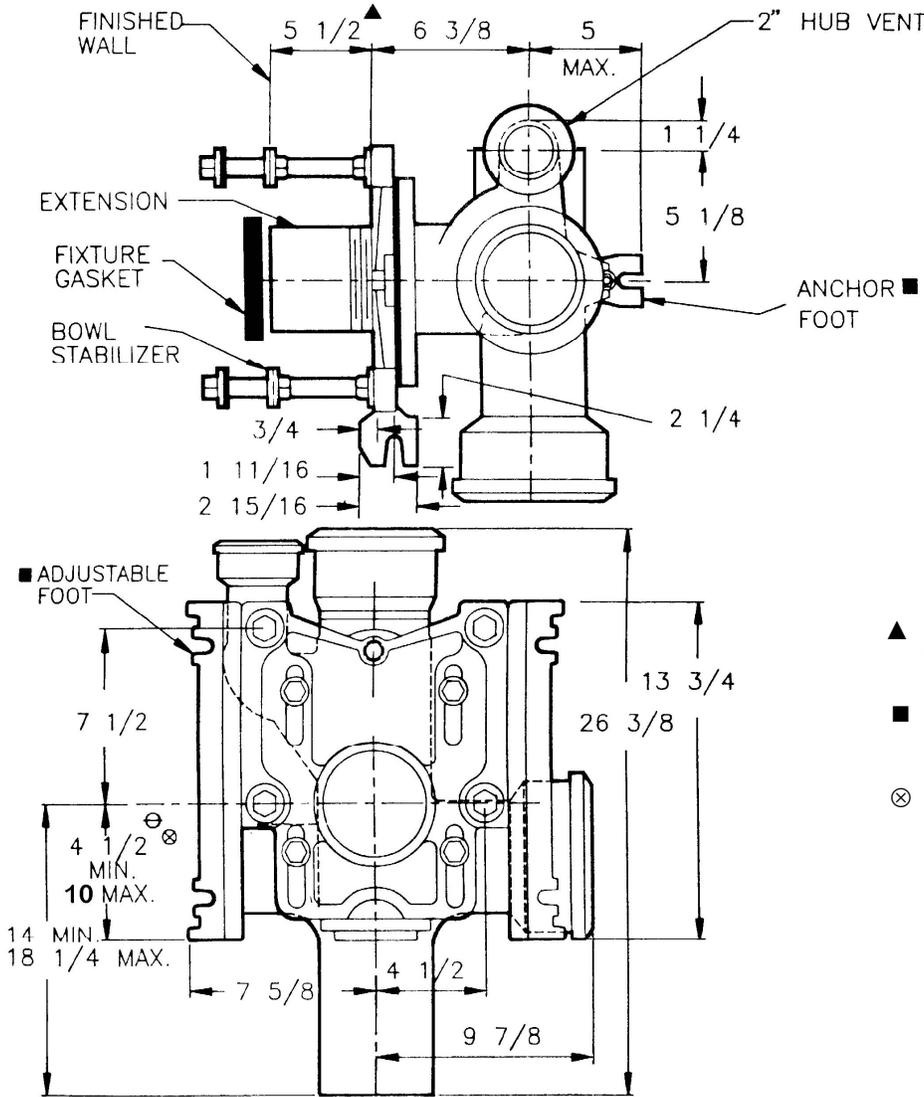

- ▲ FOR DIMENSION SHORTER THAN 5-1/2" (1" MIN) CUT EXTENSION. FOR LONGER EXTENSION (10-1/2" MAX) SPECIFY (-10)
 - RECOMMEND FEET BE SECURED TO FLOOR WITH 1/2" BOLT'S AND ANCHORS (BY OTHERS).
 - ⊗ FOR SIPHON JET ROUGHING OVER 6" OR BLOWOUT ROUGHING OVER 12-1/2" SPECIFY ON ORDER.
- SIPHON JET DIM'S SHOWN FOR BLOWOUT DIMS, USE:
 ⊕ MIN 11 & MAX 16-1/2"

	-PF	PYLON FOOT, STD.
	-OR	O-RING CARRIER
	-SD	SPECIAL-DUTY 500LB. CARRIER
	-HS	HUB & SPIGOT
	-LH4	LEFT-HAND 4" NO-HUB BRANCH
	-HRH4	RIGHT-HAND 4" HUB BRANCH
	-VP	VANDAL-PROOF TRIM
	-1	POSITIONING FRAME
	-6	SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE)

	-10	ABS EXTENSION THROUGH 10-1/2" WALL
	-24	FLOOR MOUNTED BACK OUTLET CHINA BOWL
	-30	CAST IRON ADJ. EXTENSION W/ CONNECTOR
	-30-2	CAST IRON ADJ. EXTENSION W/ CONNECTOR & TEST CAP
	-32	CARRIER FOR WIDE CHASE INSTALLATIONS
	-35	CARRIER FOR WHEELCHAIR HIGH ROUGH
	-49	NO-HUB AUXILIARY INLET, UNDER VENT
	-53	THREADED AUXILIARY INLET, UNDER VENT

DRAWING No.
A-14681-K

JOSAM COMPANY
MICHIGAN CITY, INDIANA

NOTES: