
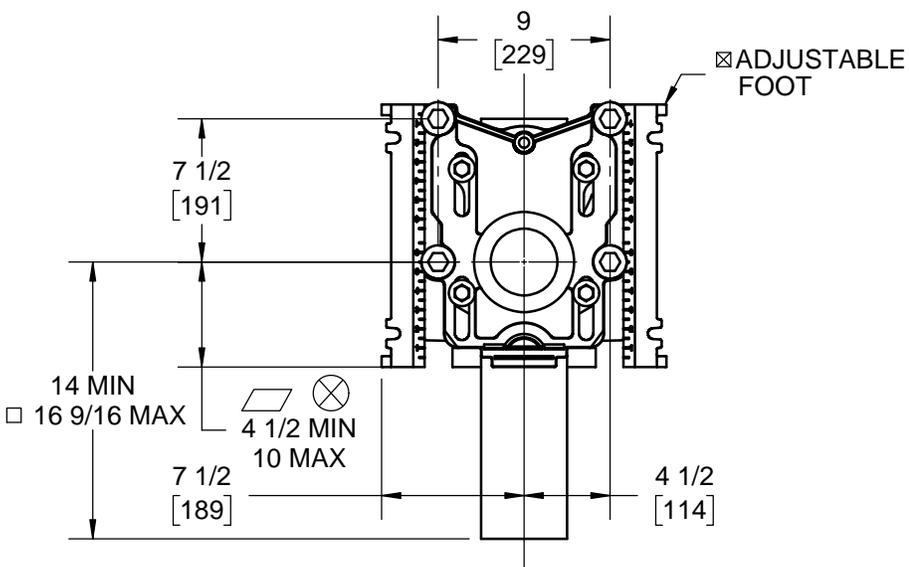
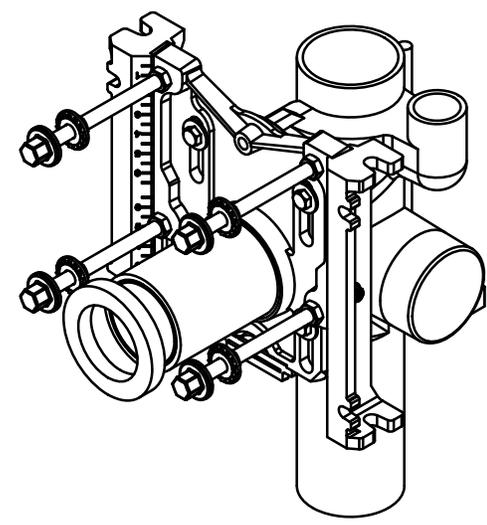


SPECIFICATION:

JOSAM 12714-SD SERIES COATED CAST IRON SINGLE VERTICAL 4" NO-HUB FITTING WITH 2" NO-HUB RIGHT-HAND OFFSET VENT, ADJUSTABLE CARRIER BODY, INVERTIBLE FOR SIPHON JET OR BLOWOUT CLOSETS, WITH ABS EXTENSION WITH INTEGRAL TEST CAP, PYLON FEET, ANCHOR FOOT, PLATED HARDWARE AND NEOPRENE FIXTURE GASKET

CLOSET CARRIER
VERTICAL WITH RIGHT HAND VENT

SERIES **12714-SD**

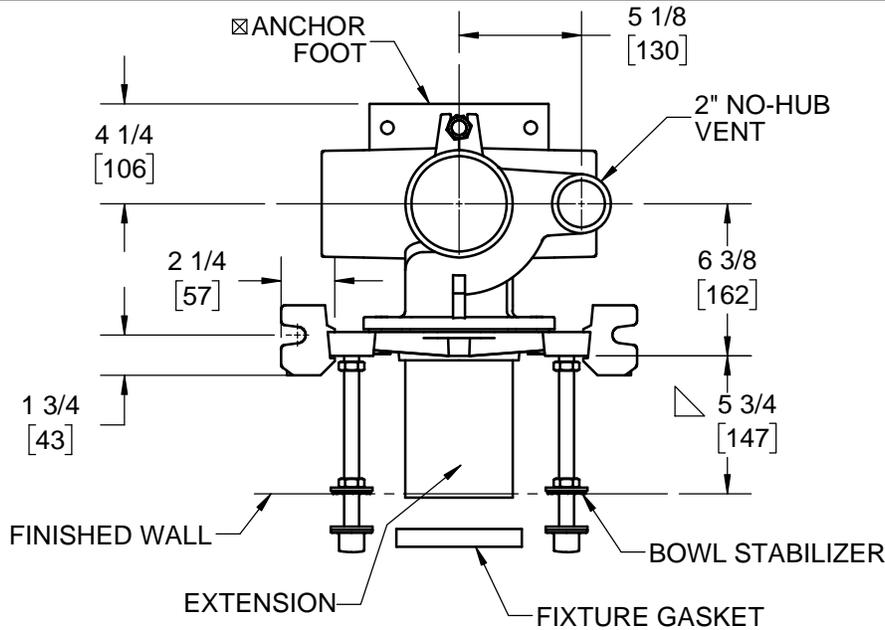

△ FOR DIMENSION SHORTER THAN 5-1/2" (1" MIN) CUT EXTENSION. FOR LONGER EXTENSION (10-1/2" MAX) SPECIFY (-10)

⊠ RECOMMEND FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS (BY OTHERS).

⊗ FOR SIPHON JET ROUGHING OVER 6" OR BLOWOUT ROUGHING OVER 12-1/2" SPECIFY ON ORDER.

SIPHON JET DIMS SHOWN. FOR BLOWOUT DIMS, USE:

▱ MIN 11 & MAX 16-1/2
□ MIN 15 11/16 & MAX 18-1/4

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

	-XSD	EXTRA SPECIAL-DUTY 1,000 LB CARRIER		-1	POSITIONING FRAME
	-PF	PYLON FOOT, STD.		-6	SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE)
	-OR	O-RING CARRIER		-10	ABS EXTENSION THROUGH 10-1/2" WALL
X	-SD	SPECIAL-DUTY 500 LB. CARRIER		-24	FLOOR MOUNTED BACK OUTLET CHINA BOWL
	-HS	HUB & SPIGOT		-30	CAST IRON ADJ. EXTENSION W/ CONNECTOR
	-LH4	LEFT-HAND 4" NO-HUB BRANCH		-30-2	CAST IRON ADJ. EXTENSION W/ CONNECTOR & TEST CAP
	-HLH4	LEFT-HAND 4" HUB BRANCH		-32	CARRIER FOR WIDE CHASE INSTALLATIONS
	-RH4	RIGHT-HAND 4" NO-HUB BRANCH		-35	CARRIER FOR WHEELCHAIR HIGH ROUGH
	-HRH4	RIGHT-HAND 4" HUB BRANCH		-49	NO-HUB AUXILIARY INLET, UNDER VENT
	-D4	DOUBLE 4" NO-HUB BRANCHES		-50	NO-HUB AUXILIARY INLET, OPPOSITE VENT
	-HD4	DOUBLE 4" HUB BRANCHES		-53	THREADED AUXILIARY INLET, UNDER VENT
	-VP	VANDAL-PROOF TRIM		-54	THREADED AUXILIARY INLET, OPPOSITE VENT

DATE OF LAST CHANGE: 5/30/18
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.



NOTES