
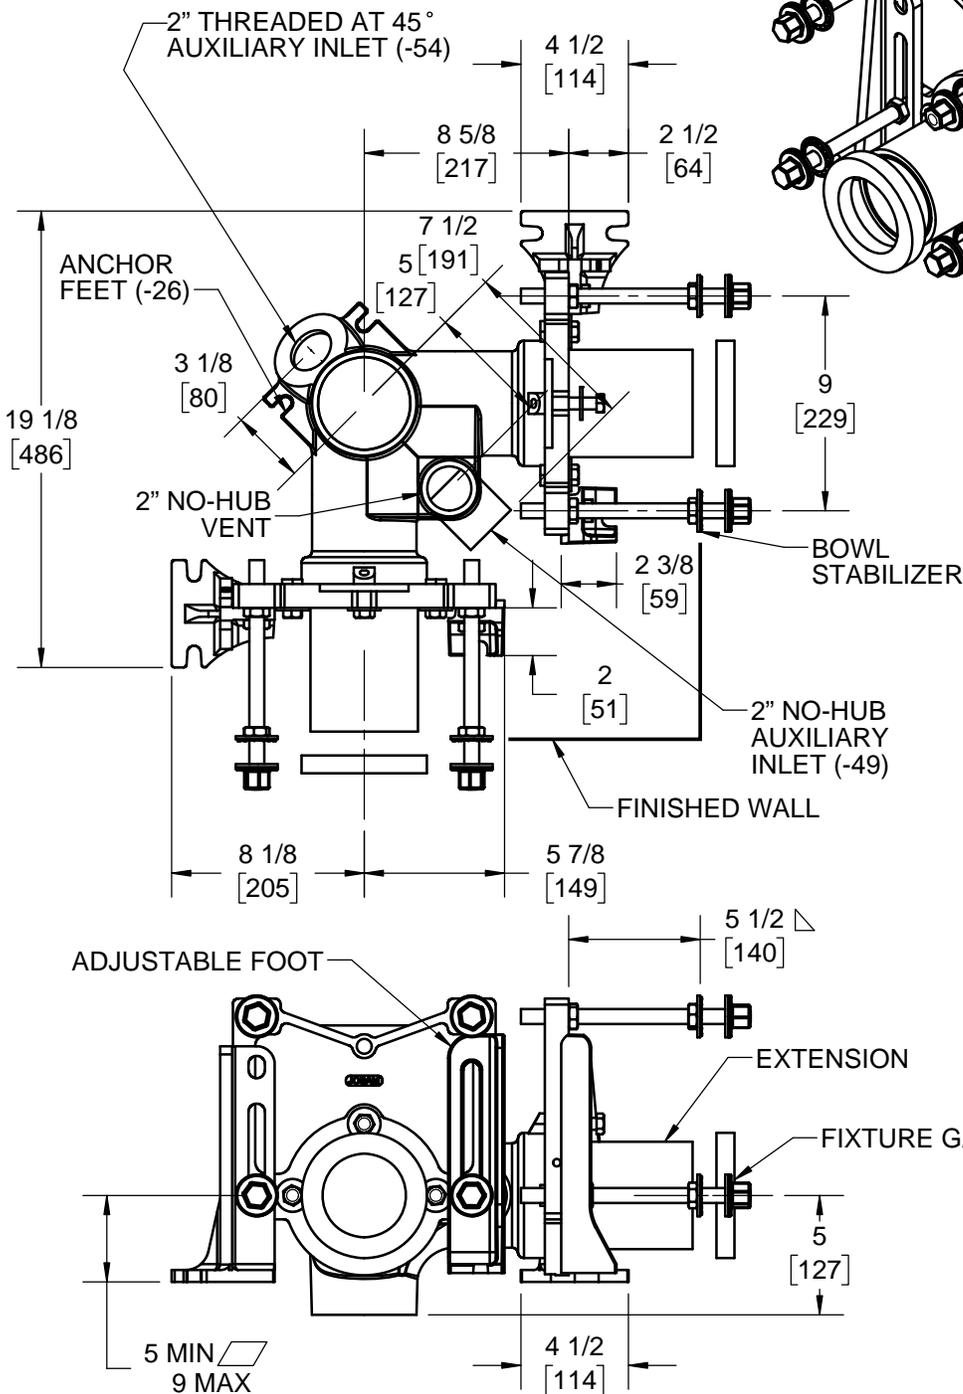


SPECIFICATION:

JOSAM 15964 SERIES COATED CAST IRON VERTICAL 4" NO-HUB DOUBLE WASTE 90° STACK FITTING WITH 4" BRANCHES, 2" NO-HUB VENT, WITH CLOSE CARRIERS INVERTIBLE FOR SIPHON JET OR BLOW-OUT CLOSETS, ABS EXTENSIONS WITH INTEGRAL TEST CAPS, BUTTRESS FEET, PLATED HARDWARE AND FIXTURE GASKET.

CLOSET CARRIER
90° INSTITUTIONAL FITTING

SERIES **15964**

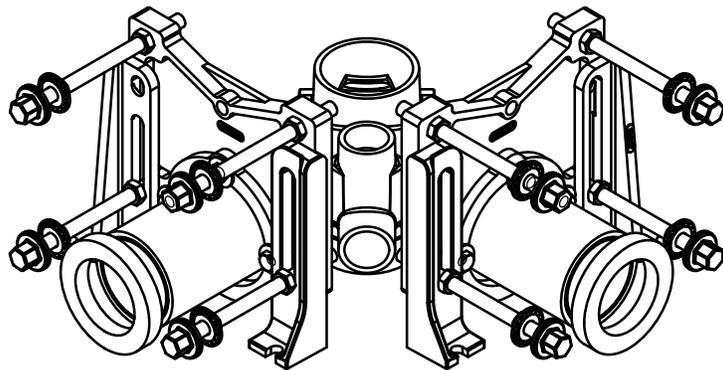

△ FOR DIMENSION SHORTER THAN 5-1/2" (1-3/4" MIN) CUT EXTENSION. FOR LONGER EXTENSION (10-1/2" MAX) SPECIFY (-10).

☒ RECOMMEND FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS (BY OTHERS).

SIPHON JET DIMS SHOWN. FOR BLOWOUT DIMS, USE:

▱ MIN 11" & MAX 16 1/2"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

| | | | |
|-----|---|-------|--|
| -VP | VANDAL-PROOF TRIM | -26 | FITTING ANCHOR FOOT |
| -1 | POSITIONING FRAME | -30 | CAST IRON ADJUSTABLE EXT W/ CONN |
| -6 | SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE) | -30-2 | CAST IRON ADJ. EXT. W/ CONN & TEST CAP |
| -10 | ABS EXTENSION THROUGH 10-1/2" WALL | -49 | NO-HUB HIGH AUXILIARY INLET, UNDER VENT |
| -24 | CARRIER FOR FLOOR MOUNTED BACK OUTLET CHINA BOWLS | -54 | THREADED HIGH AUXILIARY INLET, OPPOSITE VENT |

DATE OF LAST CHANGE: 5/31/18
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

JOSAM
MICHIGAN CITY, INDIANA

NOTES