



SPECIFICATION:

JOSAM 12724-D4 SERIES COATED CAST IRON DOUBLE VERTICAL 4" NO-HUB ON STACK FITTING WITH 4" NO-HUB BRANCH INLETS AND 2" NO-HUB OFFSET VENT, ADJUSTABLE CARRIER BODY, INVERTIBLE FOR SIPHON JET OR BLOWOUT CLOSETS, WITH ABS EXTENSION WITH INTEGRAL TEST CAP, PYLON FEET, ANCHOR FOOT, PLATED HARDWARE AND NEOPRENE FIXTURE GASKET.

**CLOSET CARRIER
VERTICAL BACK-TO-BACK**



SERIES **12724-D4**

FORMERLY 12814 SERIES

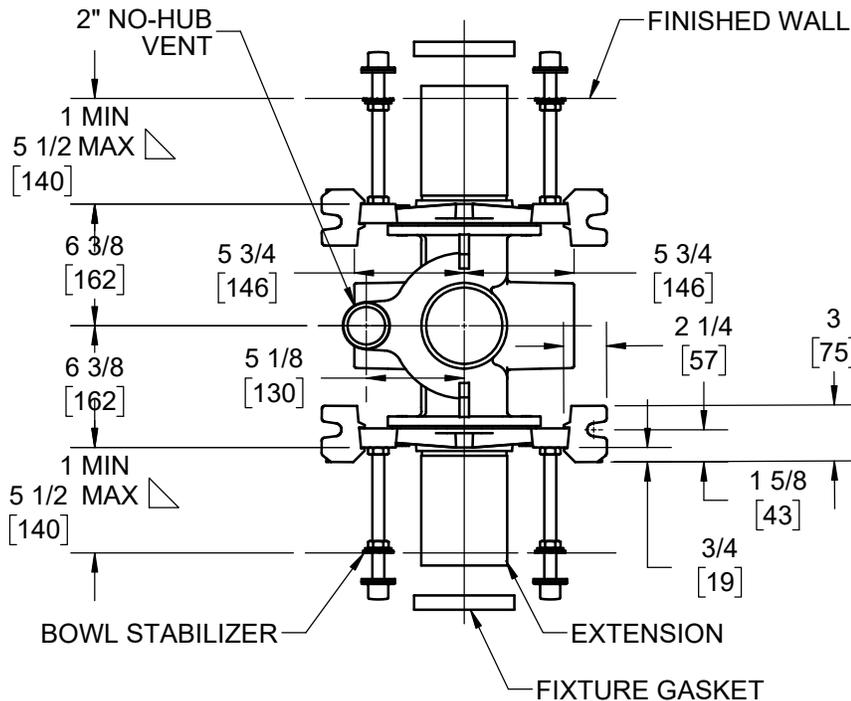

- △ FOR DIMENSION SHORTER THAN 5-1/2" (1" MIN) CUT EXTENSION. FOR LONGER EXTENSION (10-1/2" MAX) SPECIFY (-10)
- ⊗ RECOMMEND FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS (BY OTHERS).
- ⊗ FOR SIPHON JET ROUGHING OVER 6" OR BLOWOUT ROUGHING OVER 12-1/2" SPECIFY ON ORDER.

SIPHON JET DIMS SHOWN. FOR BLOWOUT DIMS, USE:

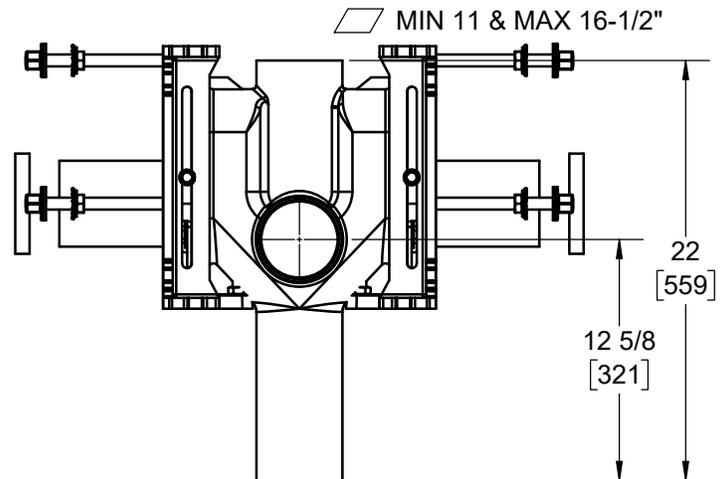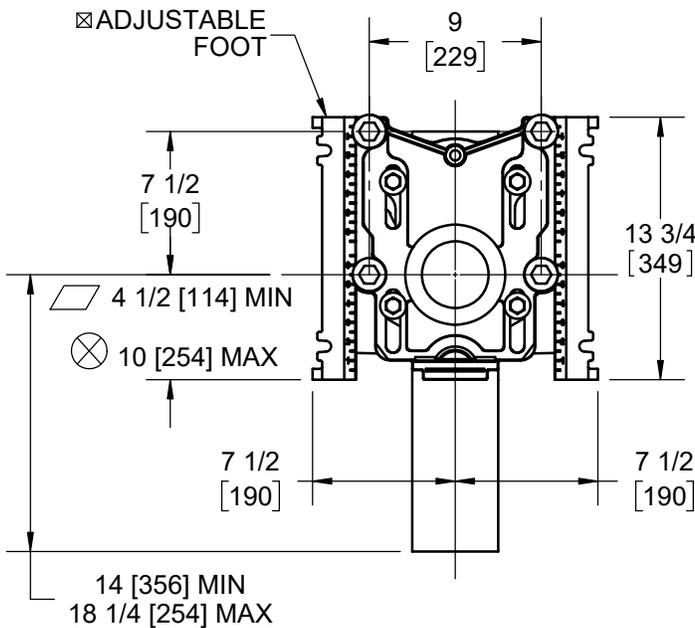

-XSD	EXTRA SPECIAL-DUTY 1,000 LB CARRIER	-6	SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE)
-PF	PYLON FOOT, STD.	-10	ABS EXTENSION THROUGH 10-1/2" WALL
-OR	O-RING CARRIER	-24	FLOOR MOUNTED BACK OUTLET CHINA BOWL
-HS	HUB & SPIGOT	-30	CAST IRON ADJ. EXTENSION W/ CONNECTOR
X -D4	DOUBLE 4" NO-HUB BRANCHES	-30-2	CAST IRON ADJ. EXTENSION W/ CONNECTOR & TEST CAP
-VP	VANDAL-PROOF TRIM	-32	CARRIER FOR WIDE CHASE INSTALLATIONS
-1	POSITIONING FRAME	-35	CARRIER FOR WHEELCHAIR HIGH ROUGH

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 11/03/22 JTJ

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

JOSAM
MICHIGAN CITY, INDIANA

NOTES