

**SPECIFICATION:**


JOSAM 14484 SERIES COATED CAST IRON DOUBLE VERTICAL 4" NO-HUB BACK-TO-BACK VERTICAL FITTING WITH 4" NO-HUB VENT, ADJUSTABLE CARRIER BODY, FOR SIPHON JET ONLY, WITH ABS EXTENSION WITH INTEGRAL TEST CAP, PYLON FEET, PLATED HARDWARE AND NEOPRENE FIXTURE GASKET.

**CLOSET CARRIER**

**DOUBLE CLOSE WITH 4" VENT**

SERIES

**14484**

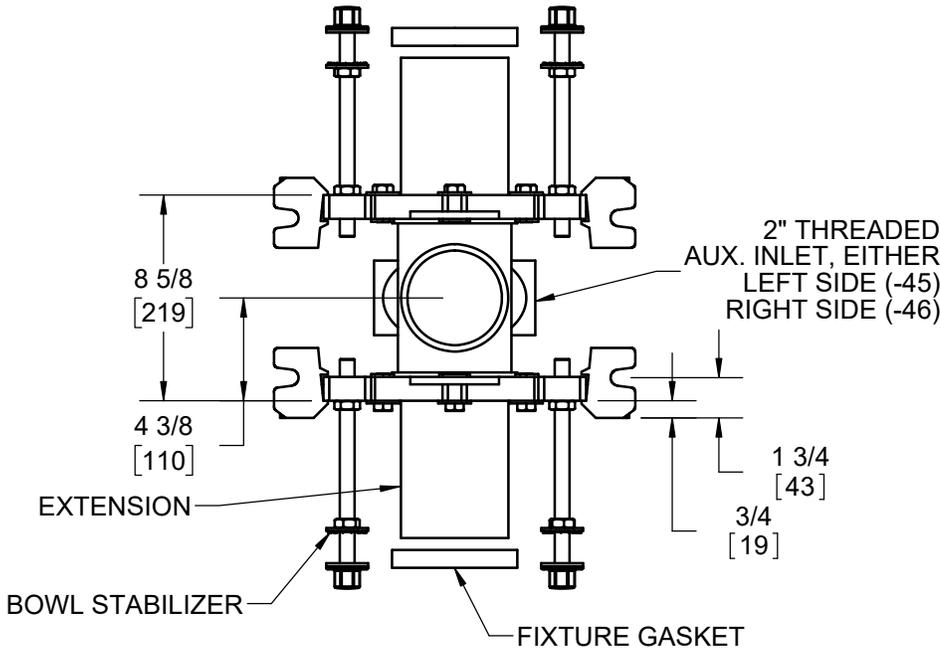



△ FOR DIMENSION SHORTER THAN 5-1/2" (1" MIN) CUT EXTENSION FOR LONGER EXTENSION (10-1/2" MAX) SPECIFY (-10).

☒ RECOMMEND FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS (BY OTHERS).

⊗ FOR SIPHON JET ROUGHING OVER 6" OR BLOWOUT ROUGHING OVER 12-1/2" SPECIFY ON ORDER.

SIPHON JET DIMS SHOWN. FOR BLOWOUT DIMS, USE:

▱ MIN 11" & MAX 16 1/2"

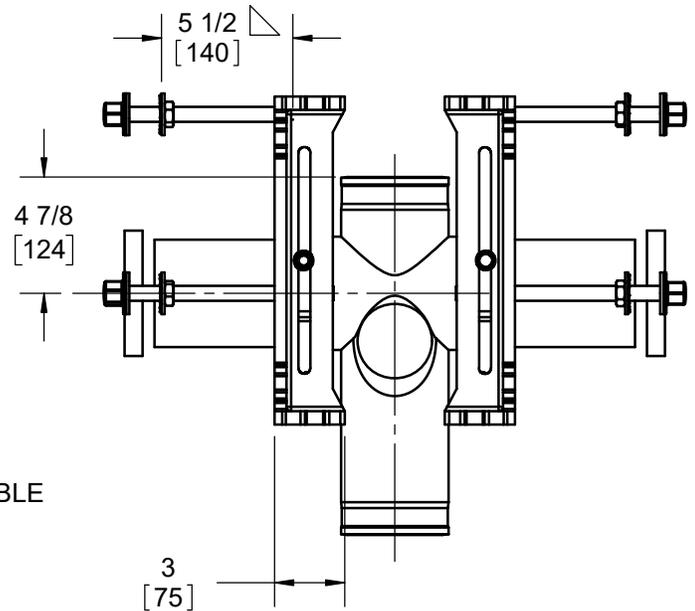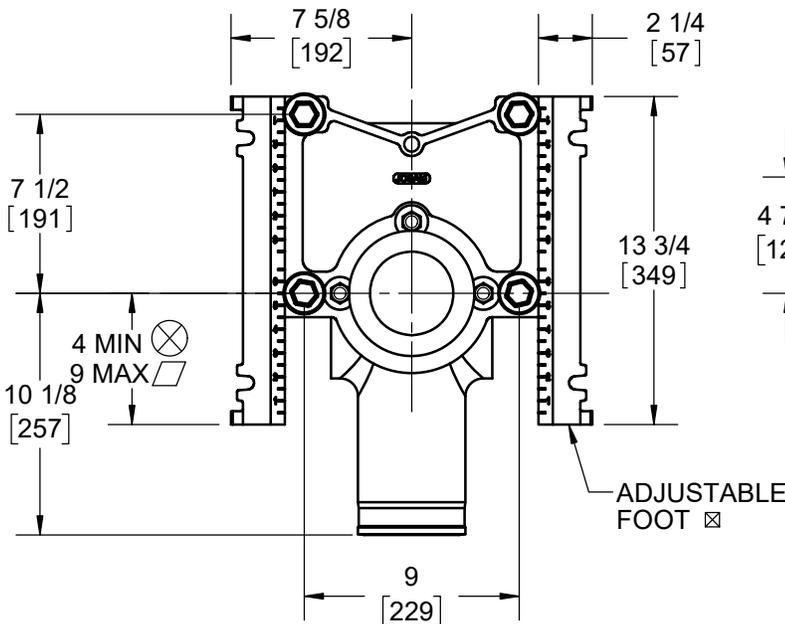

-SD	SPECIAL DUTY 500 LB CARRIER	-30	CAST IRON ADJ EXT W/ CONNECTOR
-VP	VANDAL-PROOF TRIM	-30-2	CAST IRON ADJ. EXT. W/ CONN & TEST CAP
-1	POSITIONING FRAME	-45	THREADED LEFT-HAND AUXILIARY VENT
-6	SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE)	-46	THREADED RIGHT-HAND AUXILIARY VENT
-10	ABS EXTENSION THROUGH 10-1/2" WALL	-SDH	SPECIAL DUTY HIGH 750 LB CARRIER
-24	CARRIER FOR FLOOR MOUNTED BACK OUTLET CHINA BOWLS	-XSD	EXTRA SPECIAL DUTY 1,000 LB CARRIER

DATE OF LAST CHANGE: 8/10/21

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

**JOSAM**  
MICHIGAN CITY, INDIANA

NOTES

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov