


SPECIFICATION:

JOSAM 76010-VP SERIES COATED CAST IRON RECTANGULAR SECTIONAL TRENCH DRAIN WITH HEAVY-DUTY BODY SECTIONS AND INTEGRAL ANCHOR FLANGE, HEAVY-DUTY LOOSE-SET GRATES, BOTTOM OUTLET INSIDE-CAULK CONNECTION AND VANDAL PROOF SCREWS.




TRENCH DRAIN
12" WIDE, RECTANGULAR

SERIES **76010-VP**

SLOT WIDTH 2-3/4" x 7/16" (-1 & -2 SLOT WIDTH 2-3/4" x 7/16")

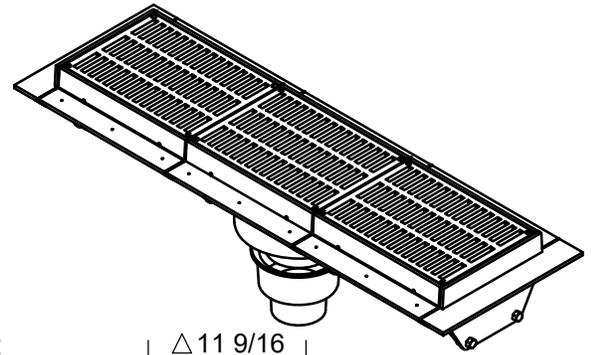


GRATE FREE AREA 56.5 SQ. IN.

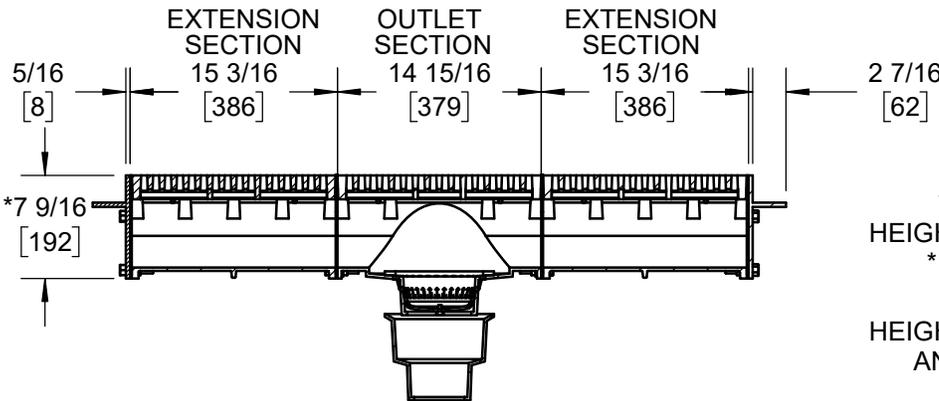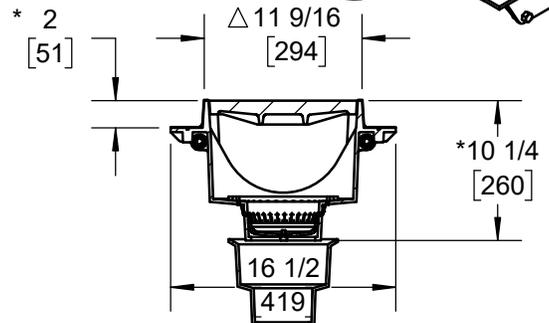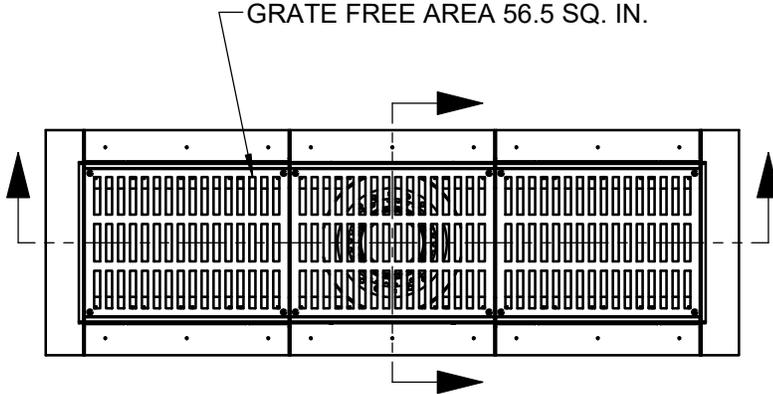

PIPE SIZE	
	3"
	4"
	6"

*13 1/2
HEIGHT OF 6" -70
*16 9/16
[421]
HEIGHT OF 3" -70
AND 4" -70



-70 SEDIMENT BUCKET
CAST IRON OPTION SHOWN

9/32 WEEPHOLES STANDARD ON ALL SECTIONS

IT IS RECOMMENDED THAT NO MORE THAN EIGHT (8) EXTENSION SECTIONS BE USED WITH ONE (1) OUTLET SECTION.

*ADD 1/4" FOR NIKALOY OR BRONZE TOP.

△ADD 3/8" TO WIDTH & OVERALL LENGTH FOR NIKALOY OR BRONZE TOP.

-EXT	EXTENSION SECTION
-1	SATIN FINISH NIKALOY TOP
-2	SATIN FINISH BRONZE TOP
-7	DUCTILE IRON GRATE
-11	CONVEX GRATE

X		
	-VP	SECURED GRATE, VANDAL-PROOF SCREWS
	-30	FLASHING CLAMP DEVICE
	-40	GALVANIZED CAST IRON PARTS
	-70	SEDIMENT BUCKET, CAST IRON
	-40-70	BUCKET, GALVANIZED
	-ARE	ACID RESISTANT EPOXY COATING

PRODUCT IS NON-CANCELABLE AND NON-RETURNABLE

NAME: _____ SIGNATURE: _____ DATE: _____

DATE OF LAST CHANGE: 05/11/21

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

JOSAM
MICHIGAN CITY, INDIANA

NOTES

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov