

**SPECIFICATION:**

JOSAM 32200-AE-SD SERIES COATED CAST IRON LEVELEZE® FLOOR DRAIN WITH ROUND TOP, GRATE SUPPORT COLLAR WITH DOUBLE DRAINAGE FLANGE AND WEEPHOLES, BOTTOM OUTLET, ADJUSTABLE COLLAR, SUPPORT RING, LARGE SUMP BODY AND LOOSE-SET SPECIAL-DUTY GRATE.

**FLOOR DRAIN**



12" ROUND SPECIAL-DUTY TOP, LEVELEZE®

SERIES **32200-AE-SD**

FORMERLY 31720 SERIES

GRATE FREE AREA: 34.26 IN<sup>2</sup>  
 STD. CAST IRON SLOT WIDTH 1/2"  
 -1 AND -2 SLOT WIDTH 1/4"

| PIPE SIZE |
|-----------|
| 2"        |
| 3"        |
| 4"        |
| 5"        |
| 6"        |
| 8"        |

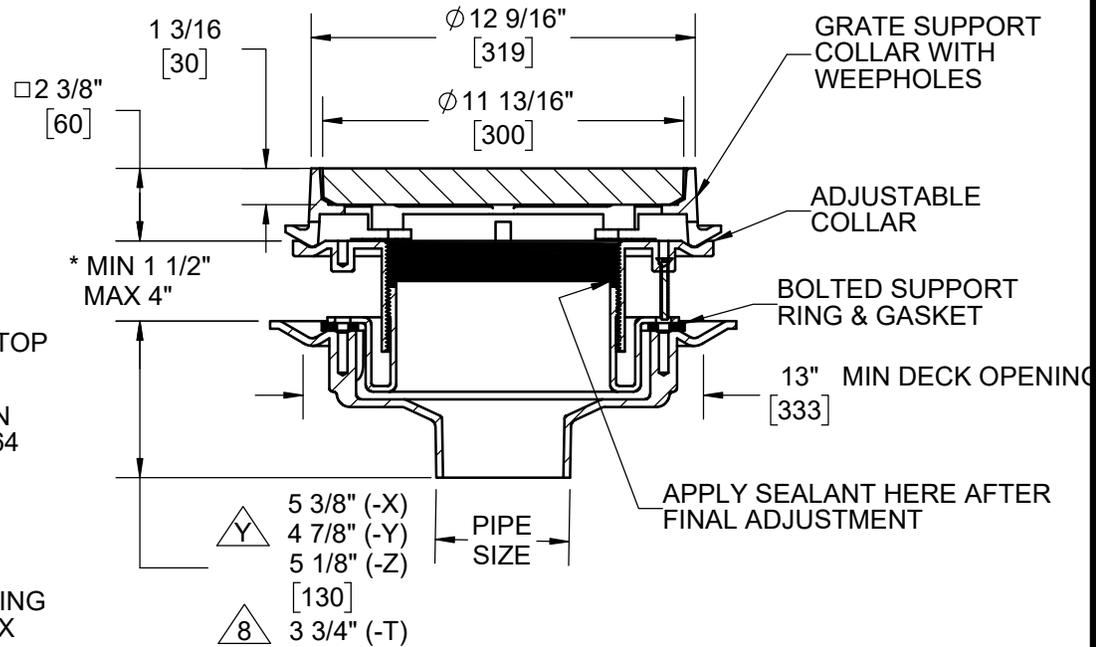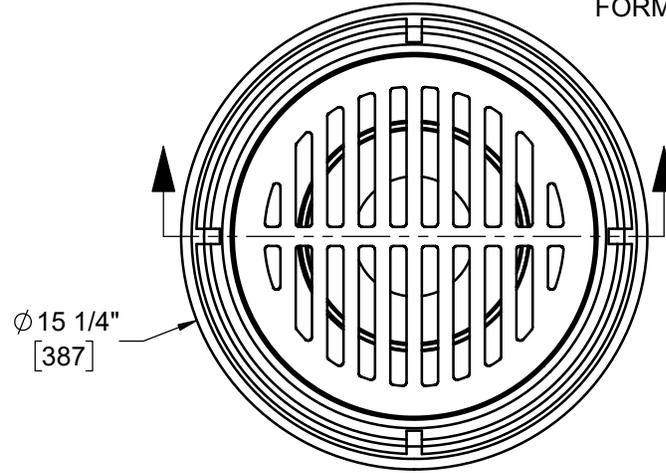

□ ADD 1/4" WHEN FURNISHED WITH NIKALOY OR BRONZE TOP

△ GASKET ON -Y CONNECTION CONFORMS WITH ASTM-C564

△ THIS DIMENSION IS 5-3/4" ON 8" THREADED OUTLET

\* WITH (-4) SECONDARY FLASHING CLAMP 2-1/4" MIN. 4-1/4" MAX

- △ Y 5 3/8" (-X)
- 4 7/8" (-Y)
- 5 1/8" (-Z)
- [130]
- △ 8 3 3/4" (-T)

|   |     |                                |
|---|-----|--------------------------------|
| X | -AE | LEVELEZE® ADJUSTABLE EXTENSION |
| △ | -81 | SLOTTED CAST IRON BUCKET       |
| X | -SD | SPECIAL-DUTY GRATE             |
|   | -1  | SATIN FINISH NIKALOY TOP       |
|   | -2  | SATIN FINISH BRONZE TOP        |
|   | -4  | SECONDARY FLASHING CLAMP       |
|   | -15 | CHAINED GRATE                  |
|   | -49 | 3/4" PRIMER TAP                |
|   | -50 | 1/2" PRIMER TAP                |
|   | -66 | NO-HUB SIDE OUTLET (2"-6")     |

|  |        |   |
|--|--------|---|
|  | -44    | FIXED EXTENSION, CAST IRON (2" STD. OR SPEC. HEIGHT)  |
|  | -44-92 | FIXED EXTENSION, GALVANIZED (2" STD. OR SPEC. HEIGHT) |
|  | -84    | SS MESH BUCKET LINER (MUST SPECIFY -81 BUCKET)        |
|  | -88    | SUPPLEMENTARY STRAINER                                |
|  | -92    | GALVANIZED CAST IRON PARTS                            |
|  | -VP    | SECURED GRATE, VANDAL-PROOF SCREWS                    |
|  | -ARE   | ACID-RESISTING EPOXY                                  |
|  | -T     | THREADED OUTLET                                       |
|  | -X     | INSIDE CAULK OUTLET                                   |
|  | -Y     | HUB OUTLET WITH GASKET (2"-4") SIZES ONLY             |
|  | -Z     | NO-HUB OUTLET   |

△ SEPARATE SUBMITTAL FOR THIS OPTION AVAILABLE

DATE OF LAST CHANGE: 10/23/19

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

**JOSAM**

MICHIGAN CITY, INDIANA

NOTES